

interva

At a preset

(1 minute to 99 hours 59 minutes)

5 combined tally counter with automatic recording function



Count Values are recorded automatically

12:00

SUB

15

DK-5000 Series

The individual count values and the total count are recorded automatically at a preset interval with a corresponding timestamp.

Whether the count values are reset to "0" or not after saving a data log is selectable.

Useful at production sites

Useful at various statistical surveys



2015-04-06 14:45:43 2015-04-06 14:45:50 2015-04-06 14:46:00 2015-04

2

7

Logging Type = "Continuous"


IINE

Present 2015-04-02 00:00:00 2015-04-03 00:00:00 2015-04-0					
Timestamp	Total	Counter1	Counter2	Counter3	
1 2015-04-01 08:00:00	0	0	0	0	
2 2015-04-01 09:00:00	15	5	5	0	
3 2015-04-01 10:00:00	25	8	10	0	
4 2015-04-01 11:00:00	55	13	25	3	
5 2015-04-01 12:00:00	80	18	35	12	
6 2015-04-01 13:00:00	103	35	40	15	
7 2015-04-01 14:00:00	115	38	43	15	
8 2015-04-01 15:00:00	160	45	55	25	
9 2015-04-01 16:00:00	205	50	62	30	
10 2015-04-01 17:00:00	255	60	72	50	
11 2015-04-01 18:00:00	350	102	82	70	
12 2015-04-01 19:00:00	375	107	84	71	
13 2015-04-01 20:00:00	380	107	86	72	
14 2015-04-01 21:00:00	395	110	89	75	
15 2015-04-01 22:00:00	420	113	95	75	
16 2015-04-01 23:00:00	445	120	102	78	
17 2015-04-02 00:00:00	478	128	110	80	
Start Time : 2015-04-01 08:00:00 End Time : 2015-04-02 00:00:00 Number of Logs : 17					



Applications


[Traffic Survey]

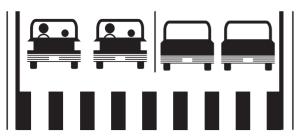

The buttons are assigned to each type of vehicle for counting passing vehicles. The count values are recorded automatically at a preset interval.

Unique features of **DK-5005C**

[At various events, shops, facilities and etc.]

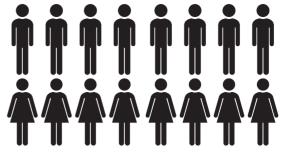


The number of visitors are counted per each age and gender. The count values are recorded automatically at a preset interval.

- 1. The individual count values and the total count are recorded automatically at a preset interval with a corresponding timestamp.
- 2. Date & Time is recorded when count values are recorded in its memory so that you can review them as time series data later.
- 3. It is easy to accumulate and edit with spreadsheet software in the case the count values are saved on the computer.


Software Windows com

The companion software enables the user to use the following functions when the device is connected to the computer with a general-purpose USB cable.

- Real-time display of count values displayed on the device
- Download the data from the device
- Export the downloaded data to a .XLS or .CSV file

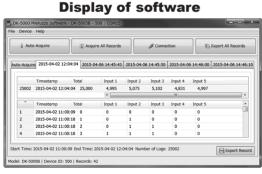

Dimensions (mm)

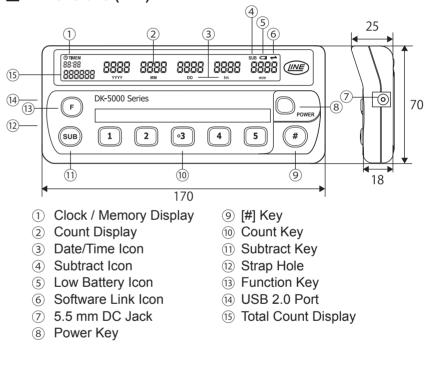

Specifications

Input Type	Rubber Key	Accessories
Display Type	7-Segment LCD Display	Instruction Manual
	Counter (x5) : 7mm(H), Total Count : 5mm(H)	* Batteries are not included.
	Record Number / Time Display : 3.5mm(H)	Please prepare AAA batteries by yourself.
Count Display	Internal : 0 - 99999(Display : 0 - 9999)	Data Communication Software
Total Count Display	0 - 999999	Downloadable from
Clock Function	Year / Month / Day / Hour(24hour) / Minute / Second	http://www.lineseiki.com
Memory	Maximum number of log recorded automatically: 48,000 logs	Options
	(Built-in flash memory)	USB-02 (USB Cable)
Data Communication	USB micro-B (USB 2.0)	* A general-purpose micro B-to-A USB
Power Source	AAA Battery x 4 pcs. USB Cable AC/DC Adapter	cable can be used.
Battery Life	200 hour min. *	AC/DC ADAPTER (DK-5)
Operating Temperature	0°C - +50°C (non-freezing)	* Please use Line Seiki AC/DC Power
Storage Temperature	-10°C - +60°C (non-freezing)	Adapter.
Weight	Approx. 130g (battery & accessories not included)	
	* (under normal operating temperature using Alkaline type battery)	

This catalog was last revised July 17, 2015.

Contents are subject to change even without prior notice. All Rights Reserved, Copyright © 2015, LINE SEIKI CO., LTD.

Head Office Contact E-mail URL

INE

NE SEIKI CO., LTD. 37-7 Chuo-cho, 2-Chome Meguro-ku, Tokyo JAPAN 152-0001 TEL:03-3716-5151 FAX:03-3710-4552 webtrade@line.co.jp http://www.lineseiki.com